


Installation with several lines

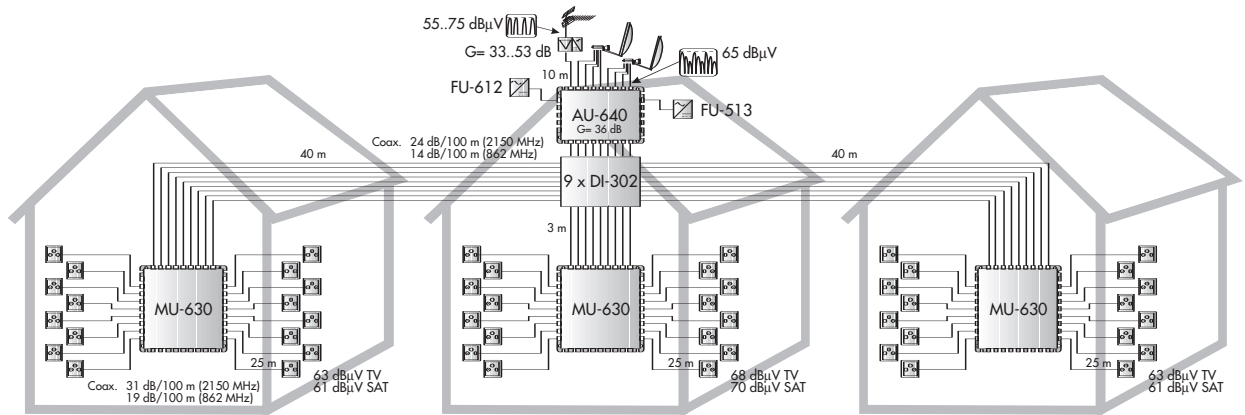

Installation with final multiswitches which distribute the terrestrial and satellite TV for three lines to the outlets. The distribution is on the 5 to 2,150 MHz band. It is necessary to use SAT amplifiers to amplify all the satellite signals. Each outlet of the installation receives the terrestrial TV and any of the satellite polarities, which are selected from the individual satellite receiver.